


3.2米高速压电写真机

3.2 Meters High Speed Piezoelectric Pictorial Machine


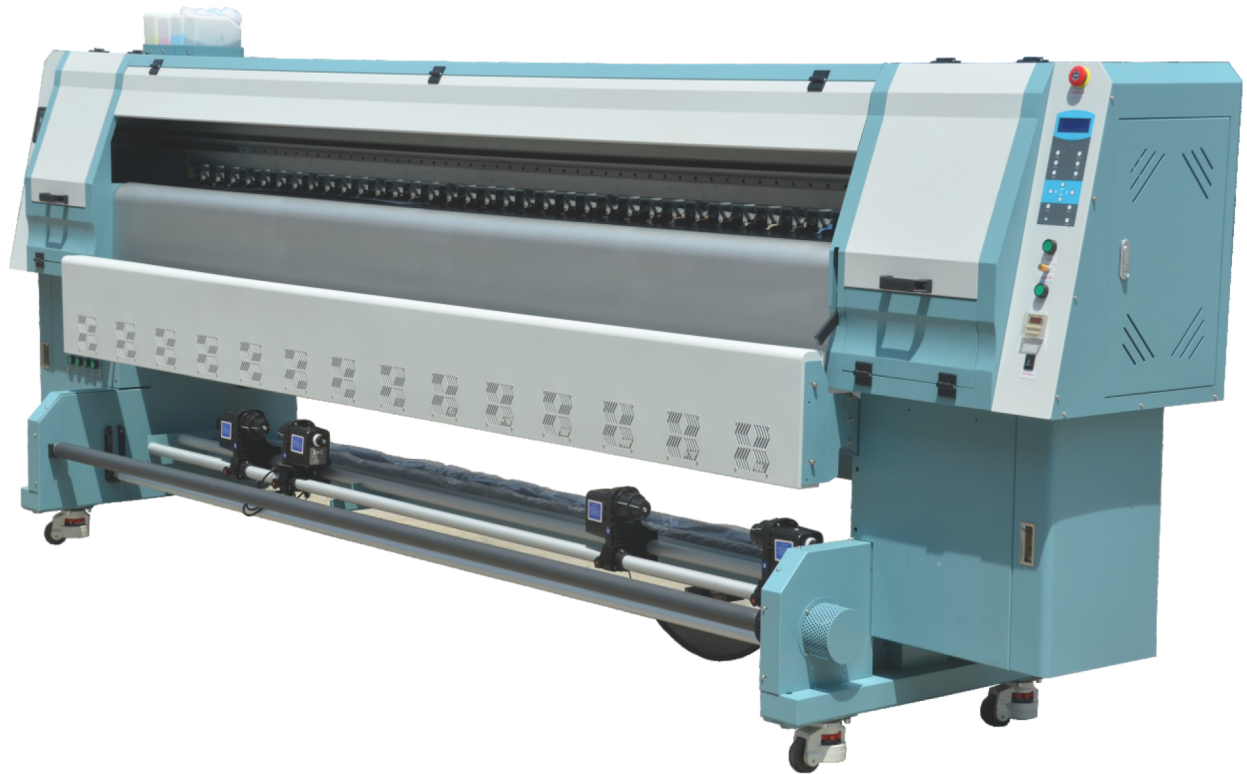


EPSON DX5 最高速度：64□/h□ 2pass□

亮点配置

Highlight the configuration

- 1.日本THK导轨
Japan THK linear guide
- 2.全新脚轮承重能力大大增加
The new wheel increase bearing capacity
- 3.加强钣金，使机器更稳固
To strengthen the sheet metal
- 4.小车防撞保护喷头
Safe anti-collision
- 5.自动收放料系统
Automatic feed/collect system

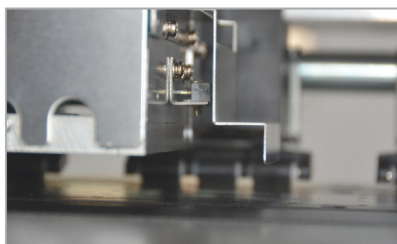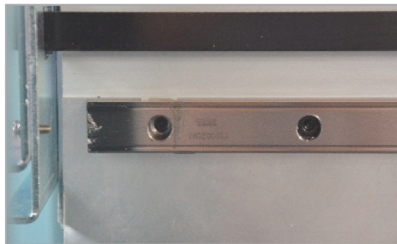

主要技术参数

The Main Technical Parameters

设备型号 Equipment model	EP(3021)				
控制板卡 Control board	博源恒芯 BYHX				
小车电机 Carriage motor	雷赛180w一体电机 Leisai 180W integration motor				
拖链 Drag chain	德国易格斯拖链 Germany IHUS Drag chain				
小车皮带 Carriage belt	德国亚德法尔克 Germany JAGDFALKE				
导轨 Linear guide	日本THK导轨配静音滑块 Japan THK linear guide with mute the slider				
机架 Printer frame	高强度高精度激光切割机架 High quality & strong Printer frame				
横梁 Beam	铝制横梁（直线度0.1mm、平面度0.05mm） Aluminum beam (straightness 0.1mm、flatness 0.05mm)				
小车 Carriage	可升降式小车 Lift type carriage				
喷头型号 Nozzle type	EPSON dx5				
喷头高度 Nozzle height	1-10mm				
最大打印幅宽 Maximum printing width	1800mm / 3200mm				
适用墨水 Apply the ink	弱溶剂/水性/热转印/UV Eco-Solvent/water based/Thermal transfer/UV				
材料使用范围 Applied materials	灯箱布/PVC/PP/卷材 Light box cloth/ PVC/PP/coiled material				
点火频率 The ignition frequency	14.4 KHZ				
打印速度 The printing speed	2Pass 4Pass 6Pass 8Pass				
	(2H)	64 /h	32 /h	22 /h	16 /h
打印精度 Print accuracy	480x360dpi	480x540dpi	720x1080dpi	720x1440dpi	
适用RIP软件 RIP software	MainTop/Photoprint/Ultrprint				
喷头保湿 Nozzle moisturizing	自动吸墨、保湿一体 Industrial nozzle specialdevice				
干燥系统 Drying system	智能红外加热&风干系统 Intelligent infrared heating & Drying system				
收放料 Feed/collect system	自动收放料系统 Auto Feed/collect system				
工作环境 Environmental conditions	温度：16 - 30℃ 湿度：40% - 60% Temperature: 16 - 30℃ Relative Humidity: 40% - 60%				
电源/功率 Power supply / power	AC220 / 1000W (print) 3000W (Dry)				
产品尺寸 (mm) Product size (mm)	4850 X 1070 X 1670 mm				
产品重量 Product weight	870kg				