


1.8米高速压电写真机

1.8 Meters High Speed Piezoelectric Pictorial Machine

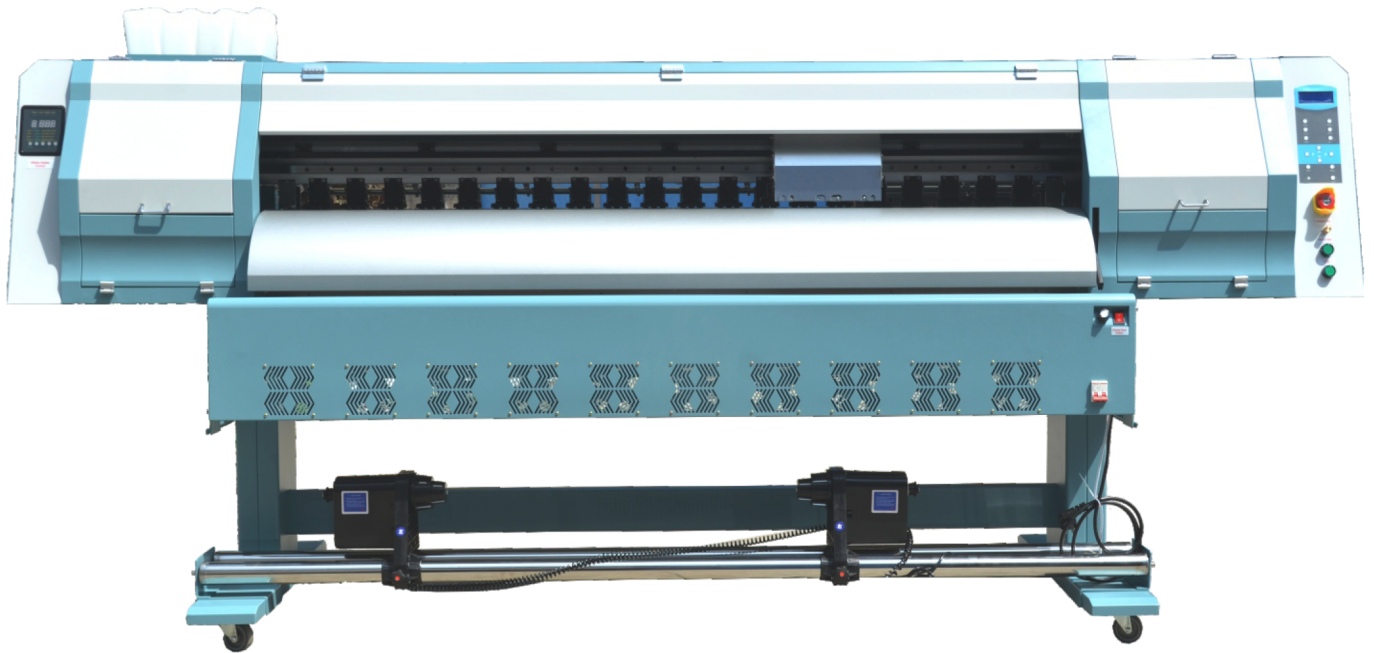


EPSON DX5 最高速度：64 /h (2pass)

亮点配置

Highlight the configuration

- 1.日本THK导轨
Japan THK linear guide
- 2.二级墨盒安全托架
The ink box bracket
- 3.加强钣金，使机器更稳固
To strengthen the sheet metal
- 4.小车防撞保护喷头
Safe anti-collision
- 5.自动收放料系统
Automatic feed/collect system

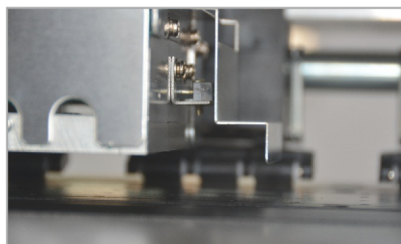

主要技术参数

The Main Technical Parameters

设备型号 Equipment model	EP(1801)			
控制板卡 Control board	博源恒芯 BYHX			
小车电机 Carriage motor	雷赛180w一体电机 Leisai 180W integration motor			
拖链 Drag chain	德国易格斯拖链 Germany IHUS Drag chain			
小车皮带 Carriage belt	德国亚德法尔克 Germany JAGDFALKE			
导轨 Linear guide	日本THK导轨配静音滑块 Japan THK linear guide with mute the slider			
机架 Printer frame	高强度高精度激光切割机架 High quality & strong Printer frame			
横梁 Beam	铝制横梁（直线度0.1mm、平面度0.05mm） Aluminum beam (straightness 0.1mm、flatness 0.05mm)			
小车 Carriage	可升降式小车 Lift type carriage			
喷头型号 Nozzle type	EPSON dx5			
喷头高度 Nozzle height	1-10mm			
最大打印幅宽 Maximum printing width	1800mm / 3200mm			
适用墨水 Apply the ink	弱溶剂/水性/热转印/UV Eco-Solvent/water based/Thermal transfer/UV			
材料使用范围 Applied materials	灯箱布/PVC/PP/卷材 Light box cloth/ PVC/PP/coiled material			
点火频率 The ignition frequency	14.4 KHZ			
打印速度 The printing speed	2Pass 4Pass 6Pass 8Pass			
	(2H)	64 /h	32 /h	22 /h 16 /h
打印精度 Print accuracy	480x360dpi	480x540dpi	720x1080dpi	720x1440dpi
适用RIP软件 RIP software	MainTop/Photoprint/Ultrprint			
喷头保湿 Nozzle moisturizing	自动吸墨、保湿一体 Industrial nozzle special device			
干燥系统 Drying system	智能红外加热&风干系统 Intelligent infrared heating & Drying system			
收放料 Feed/collect system	自动收放料系统 Auto Feed/collect system			
工作环境 Environmental conditions	温度：16 - 30℃ 湿度：40% - 60% Temperature: 16 - 30℃ Relative Humidity: 40% - 60%			
电源/功率 Power supply / power	AC220 / 1000W (print) 3000W (Dry)			
产品尺寸 (mm) Product size (mm)	3270 X 700 X 1390 mm			
产品重量 Product weight	470kg			